

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number  
**WO 2004/007851 A1**

(51) International Patent Classification<sup>7</sup>: **E02F 3/36**

(21) International Application Number:  
PCT/SE2003/001212

(22) International Filing Date: 15 July 2003 (15.07.2003)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:  
0202205-1 15 July 2002 (15.07.2002) SE

(71) Applicants: **DAHLSTRÖM**, Magnus (heir of the deceased inventor) [SE/SE]; Fjällgatan 22, S-116 28 Stockholm (SE). **VIKTORSSON**, Lisa (heiress of the deceased inventor) [SE/SE]; Bergmansgatan 20, S-983 35 Malmberget (SE). **DAHLSTRÖM**, Johanna (heiress of the deceased inventor) [SE/SE]; Centralvägen 3, 3tr, S-186

31 Vallentuna (SE). **DAHLSTRÖM**, Sara (heiress of the deceased inventor) [SE/SE]; Dalbovägen 4B, S-191 45 Sollentuna (SE).

(71) Applicant and

(72) Inventor: **SEGERLJUNG**, Max [SE/SE]; Penglund 112, S-911 94 Vännäs (SE).


(72) Inventor: **DAHLSTRÖM**, Kurt (deceased).

(74) Agents: **OLSSON**, Jan et al.; Bjerkéns Patentbyrå KB, Box 1274, S-801 37 Gävle (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO,

[Continued on next page]

(54) Title: A SECURING DEVICE

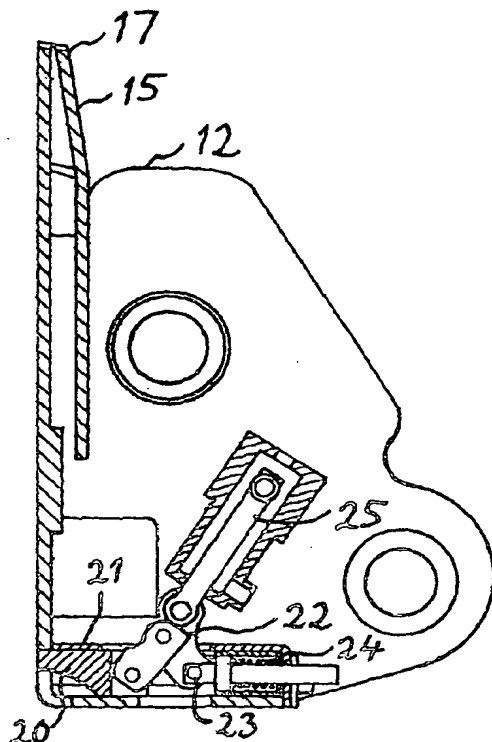

(57) Abstract: A device for attaching a first part in the form of an instrument or a tool to a second part in the form of a beam or such on a working machine comprising, on each of the parts, one engagement means fixed thereto, which are designed to be driven into engagement with each other so that the force of gravity on the first part holds the parts attached to one another. A first (17) of the engagement means is of the male-type having external surfaces converging towards each other and a second of the engagement means is of the female-type having internal surfaces converging towards each other in a corresponding way to said surfaces of the first engagement means for receiving and holding the first engagement means in the second engagement means under the influence of the force of gravity on the first part.

WO 2004/007851 A1